

### Features:

- polyethylene container with 150 litres capacity and up to 80 litres switching volume
- vortex pumps with high efficiency and low operation noise
- mechanical seal and shaft seal with intermediate oil chamber
- inlets: 2 x lateral DN 100, 1 x lateral DN 50, 1 x back DN 100 and 1 x top DN 50/100
- additional connections 1 1/2" for manual diaphragm pump
- air vent DN 70 (Ø 75mm)
- operation temperature max. 55°C
- operating mode S3 - 25%
- protection grade IP 68 - fully submersible

### Application:

- removal of domestic sewage out of single- or multi family houses
- in public institutions, where the disposal of sewage must not be interrupted
- above-ground installation in rooms protected from frost below the backwash level

### Scope of delivery:

- pre-assembled lifting unit with 3,5 m connection cable to the motor and 3,5 m pneumatic tube to the control with integrated non-return valves DN 100 (Kompaktboy Duplex 3,0-2P with external cast iron non-return valves)
- Y-pipe DN 100/100/100
- connection flange piece DN 100 for pressure pipe (DN 80 optional)
- flexible connection with tension clamps for pressure pipe and ventilation pipe
- incl. ZPS2: comfortable, pneumatic level control with microcontroller, LCD plain text display for filling level, maintenance, operating hours, fault message and alarm signal in switchbox for indoor installation




### Product benefits:

- compact dimensions
- pre-assembled - connection pieces, non-return valve integrated (except 3kW)
- comfort control unit included in delivery
- high delivery heads
- integrated pressure measurement for mm-precise switch points
- all-side connections for easy installation in cramped rooms

### Technical data:

Art.no.	U [V]	P <sub>1</sub> [W]	P <sub>2</sub> [W]	I <sub>n</sub> [A]	n [min <sup>-1</sup> ]	Q <sub>max</sub> [m <sup>3</sup> /h]	H <sub>max</sub> [m]	SH [mm]	P0	Weight [kg]
17560	400	3.800	3.000	6,2	2800	35,0	15,0	50	DN 100	126

### Characteristics:

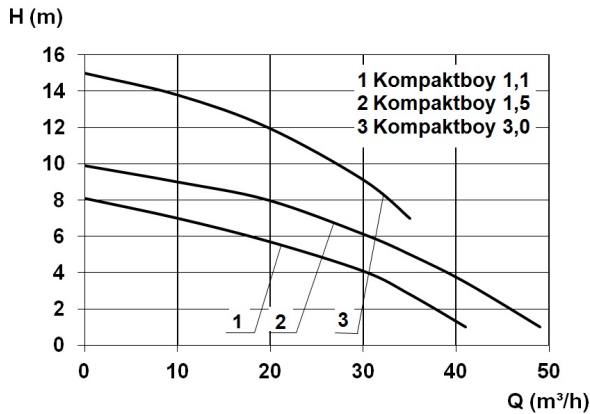

### Materials:

Seal motor:	shaft seal
Seal pump:	mechanical seal

### Dimensions:

